

## 8 Way Sounder Output Board

### Features

- Provides 8 Monitored Sounder Outputs
- All Outputs are Fully Programmable using Function and Cause & Effect Programming
- Compatible with the **ZoneSense<sup>Plus</sup>** Fire Control Alarm Panel
- Compatible with the **LoopSense** Fire Control Alarm Panel
- Compatible with **FireFinder<sup>Plus</sup>** Fire Control Alarm Panel

### Description


The 8 Way Sounder Output Board provides additional sounder outputs and enhances the capabilities for the **FireFinder<sup>Plus</sup>**, **LoopSense** and **ZoneSense<sup>Plus</sup>** Fire Alarm Control Panels (FACP).

Each Sounder Output is monitored for short and open circuit fault conditions.

The Sounder Outputs can be configured to be continuously on/off or pulsed on and off.

By using the applicable programming tools for the **FireFinder<sup>Plus</sup>** and **LoopSense** or via the front panel controls on the **ZoneSense<sup>Plus</sup>** each output can be programmed to respond to the following panels statuses:

- Fire/Alarm
- Pre-Alarm
- Evacuate
- Faults
- Ancillary Actions
- And others depending on the FACP

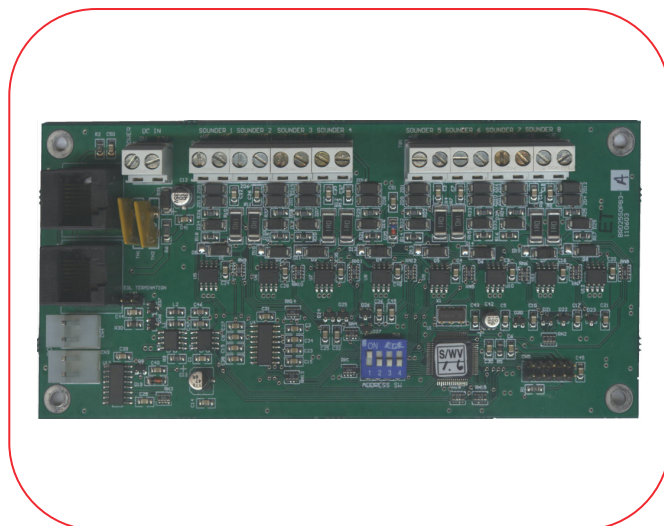

Sounder Output Board

### Item Numbers

4310-0060 8 Way Sounder Output Board

### Specifications

Operating Voltage	27Vdc
Quiescent Current	5.6mA
Max Current no load	26mA
Sounder Output Rating	500mA at 27Vdc each
EOL Monitoring Value	10k $\Omega$
System Capacity	
FireFinder Plus	15 Max*
LoopSense	15 Max*
ZoneSense Plus	1 Max
	*Depending on cabinet size
Temperature	-20 °C to 70 °C
Humidity	0 - 95% (non condensing)