
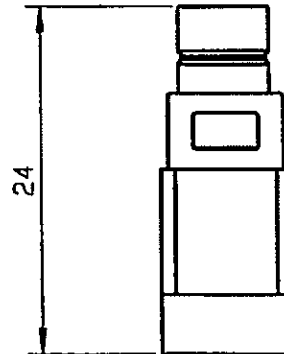


'U' LINK FEMALE - FEMALE WITH TEST PORT
PITCH 10

Series : HDC 43

1 / 1

096263Z

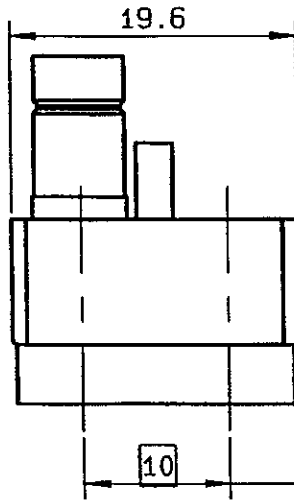

LINK 10B

CABLES : NA

CHARACTERISTICS

NOMINAL IMPEDANCE	75 Ω
FREQUENCY RANGE	0-3 GHz
TEMPERATURE RATING	-40/+100 °C
VSWR	NA + 0 x F(GHz)Max1
RF INSERTION LOSS	NA \sqrt{F} (GHz) dB Max1
VOLTAGE RATING	500 Vrms Max
DIELECTRIC WITHSTANDING VOLTAGE	1500 Vrms min
INSULATION RESISTANCE	5000 M Ω min
HERMETIC SEAL	NA Atm.cm3/s
LEAKAGE (pressurized only)	NA Mpa
WEIGHT	10 gr

STANDARDISATION

CABLE RETENTION

CENTER CONTACT RETENTION

Axial force - mating end	22	N min
Axial force - opposite end	NA	N min
Torque (Min)	NA	cm.N min

RECOMMENDED TORQUES

Mating	NA	cm.N
Panel nut	NA	cm.N
Clamp nut	NA	cm.N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	ZAMAC	NICKEL
OUTER CONTACT	BRONZE	GOLD
CENTER CONTACT	BERYLLIUM COPPER	GOLD
INSULATOR	PTFE	-
TEST PORT	BRASS	GOLD
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Initiated on 04/03/96

The information given here is subject to change without notice. Design changes may be in order to improve the product



Approval by MARTIN

GERALD U