


**Product Name:** Omni-Blend Drywall Access Panel  
**Product Code:** BYDAPOB

## General Schematic

---

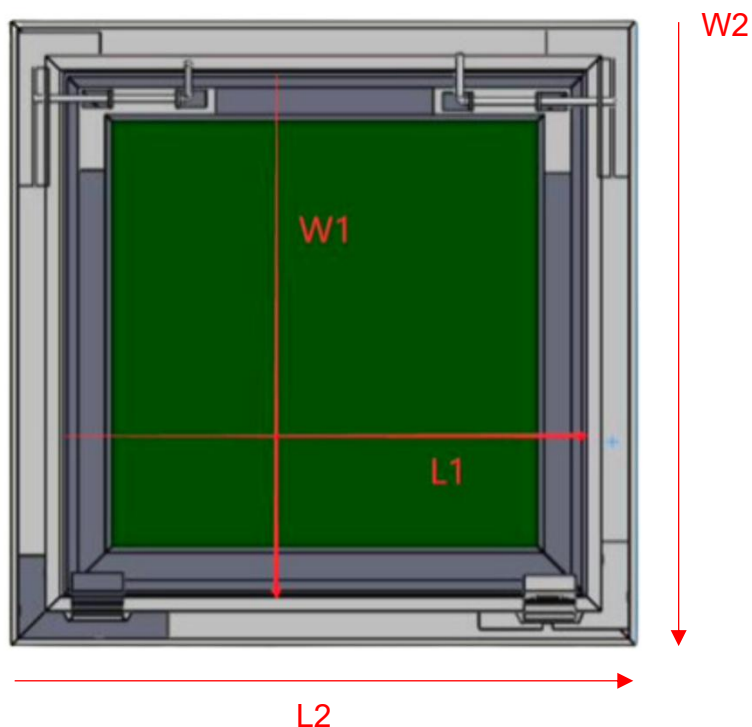

## Definitions

---

**Neck size:** Size of the opening that would be cut into the wall/ceiling to install the access panel. Size of access panel as visible once installed. Depicted via L1, W1 in schematic

**Opening size:** Cited in listing title. Size of opening available for access once panel is installed

**Overall size:** Total size of access panel including frame (hidden behind wall/ceiling). Depicted via L2, W2

## Size chart

Product number	Opening size (in)	Opening size (mm)	Neck size L1XW1 (mm)	Overall size L2XW2 (mm)
BYDAPOB-0808	8X8	200X200	205X205	257X257
BYDAPOB-0810	8X10	200X250	205X255	275X325
BYDAPOB-1212	12X12	300X300	305X305	357X357
BYDAPOB-1220	12X20	300X500	305X505	375X575
BYDAPOB-1224	12x24	300X600	305X605	375X675
BYDAPOB-1616	16X16	400X400	405X405	457X457
BYDAPOB-1624	16X24	400X600	405X605	475X675
BYDAPOB-2020	20X20	500X500	505X505	557X557
BYDAPOB-2024	20X24	500X600	505X605	575X675
BYDAPOB-2424	24X24	600X600	605X605	657X657

## Other specifications:

- 1.2mm extruded aluminum profile frame
- White powder coating finish
- 12.5mm moisture resistant gypsum board
- Mini latch push to open
- Safety wire and hook
- Brush seal between frames
- Spring loaded hinge door fully removable
- Made in China



## Installation Guidance

---

1. Measure neck size of access panel
2. Cut hole on wall +5mm larger than neck size
3. Remove the door from the panel frame
4. Fit the frame to the hole
5. Fix frame on the drywall using drywall screws
6. Replace the door on the frame
7. For applications where panel is to match the surrounding wall, finish the door as with normal drywall finishing, ie mudding, sanding and painting