

AIR-VENTILATION FAN

Features

- 1) saving energy
- 2) strong wind power
- 3) convenient to move
- 4) make low noise and light weight due to die-casting aluminum alloy.
- 5) with good capacity, the reasonable structure and the strong suction.
- 6) The protection grade of CTF-20 , CTF-25 is IP54, And CTF-30 is IP55

Application

- 1) It's special manufactured for underground cable maintainance, shipping making.
- 2) blowing bad gas when welding shipbuilding, canning, bridge.
- 3) exhaust for fire fighting, piping construction and in other violent working situation for ventilation.



CTF-20、25、30




CTF-30



CTF-30、35

TECHNICAL PARAMETERS

Model no . CTF	Diameter (mm)	Voltage (V)	Frequency (Hz)	Speed (r/min)	Watts (W)	Capacity (m ³ /min)	Static (pa)	Noise dB(A)
CTF-20	200 (8")	110	50/60	2800/3300	180/230	25/30	245/295	61
CTF-20	200 (8")	220~240	50/60	2800/3300	180/230	25/30	245/295	61
CTF-25	250 (10")	110	50/60	2800/3300	300/350	45/55	295/350	66
CTF-25	250 (10")	220~240	50/60	2800/3300	300/350	45/55	295/350	66
CTF-30	300 (12")	110	50/60	2800/3300	500/550	65/77	385/450	69
CTF-30	300 (12")	220~240	50/60	2800/3300	500/550	65/77	385/450	69
CTF-35	350 (14")	110	50/60	2800/3300	750	82/90	498/550	73
CTF-35	350 (14")	220~240	50/60	2800/3300	750	82/90	498/550	73

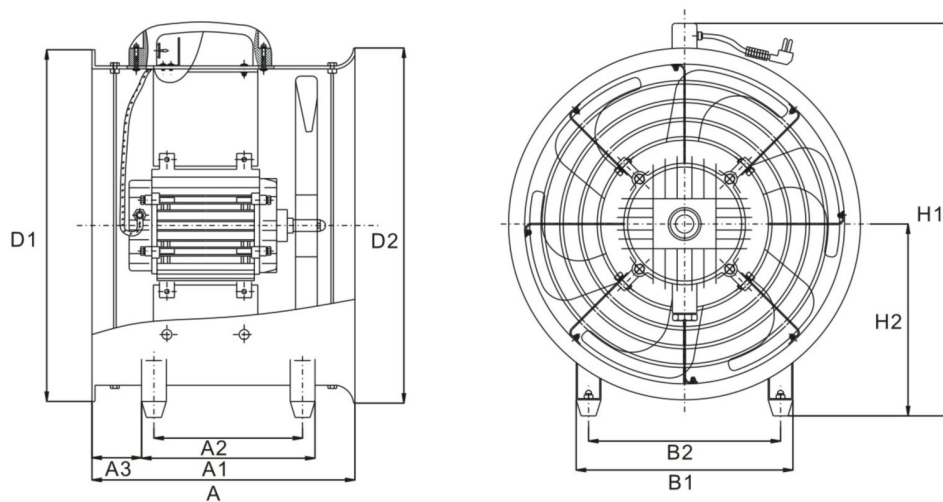

INSTALLATION SIZE

Model no .	D1	D2	H1	H2	A	A1	A2	A3	B1	B2
CTF-20	φ220	φ272	325	160	345	247	210	40	210	170
CTF-25	φ280	φ325	375	190	355	247	210	60	220	175
CTF-30	φ330	φ380	425	220	380	265	225	60	265	220
CTF-35	φ385	φ430	490	260	400	300	230	50	300	250