



**POMA**

**COMPACT FLOAT**

The POMA is a strong and efficient automatic pump in 304 stainless steel and thermoplastic. An exceptionally large flow is produced from an energy efficient 150-watt motor, which makes it ideal for many domestic and industrial jobs, particularly cellar and processing duties. It is not recommended for ponds or water features. It is also popular with water companies, who select it for its solids handling, level control and reliability. The close, compact positioning of the optional integral tube float switch is particularly suited to applications where a sump is narrow or where a traditional pendant type float's operation could be fouled. The 403 stainless steel shaft is fitted with an ultra hardwearing, double mechanical seal (inboard: silicon carbide-silicon carbide) - running in an oil chamber - and a vortex, thermoplastic impeller gives good soft solids handling. Supplied with 10 metres of heavy duty rubber power cable.

Users of 230volts have the option to select from two versions: the "domestic" is supplied with a hose tail and a hose clip (for fitting to flexible discharge hose) and a 3 pin plug fitted with a 5 amp fuse.


The "industrial" is supplied with a female BSP outlet (for fitting rigid waste pipe) but without a plug. 110volt pumps are supplied as "industrial".

- Industry
- Utilities
- Processing
- Cellars
- Basements
- Final effluent



**POMA (domestic)**

**POMA (industrial)**

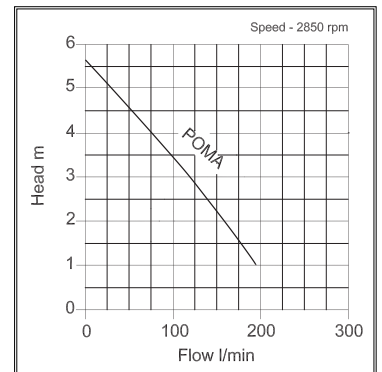

item code	model	Manual or Auto	outlet (BSPF/mm)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	w x l x h (mm)	on level (mm)	off level (mm)	dry weight (kgs)	Price (£)	code
10-10-1257	POMA industrial	A	2"	0.15	110	190	5.7	35	183x225x354	285	100	6.60	325.00	1
10-10-1072	POMA industrial	A	2"	0.15	230	190	5.7	35	183x225x354	285	100	6.60	325.00	1
10-10-1179	POMA domestic	A	50	0.15	230	190	5.7	35	183x225x354	285	100	6.60	330.00	1