


TP

24 HOUR RUNNING

- Ponds
- Water features
- Fountains
- Water walls
- Special effects



The TP series has been specifically designed for use in the harsh environment of water features and fish ponds, but they can also be used for sump and transfer applications. The construction incorporates heavy duty bearings, a hard stainless steel (410) shaft fitted with an ultra-hard wearing silicon carbide mechanical seal (in a chamber of non-toxic oil) for durability and continuous operation. The motor case, pump body, strainer and impeller are constructed of thermoplastic for corrosion resistance. Available in two formats: the TPS will handle fish waste and dead plants up to 5mm while the TPV can handle up to 19mm. Supplied with 10 metres of heavy duty rubber power cable.

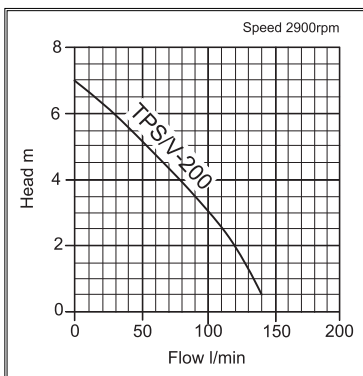

TPS-200S



TPV-200SA

item code	model	Manual or Auto	outlet (mm)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	w x l x h (mm)	dry weight (kgs)	Price (£)	code
15-10-1091	TPS-200S	M	32	0.20	230	140	7	5	146x170x330	3.90	107.00	4
15-10-1009	TPS-200SA	A	32	0.20	230	140	7	5	146x170x330	4.05	124.00	4
15-10-1092	TPV-200S	M	32	0.20	230	140	7	19	146x170x330	3.90	107.00	4
15-10-1086	TPV-200SA	A	32	0.20	230	140	7	19	146x170x330	4.05	124.00	4