



For Wall Mount with
SumUp Air

Installation Guide


Locate the components



locpad case



Tablet fit kit




Acrylic faceplate



Metal front plate



Metal disk
(Not required)



Arm & card
reader holder



Dual output
power supply



4 x Wall mount
screws



4 x Rawl plugs



2 x 30mm tapered
head screws



4 x 15mm pan
head screws



USB-A to USB-C
L shaped head



USB-A to Micro usb
L shaped head



USB-A
USB-C

Step 1

Press the fit kit into place onto the round pegs on the locpad rear case. Both bottom and top fit kit parts are identical.




There are guiding pegs on the case and holes in the fit kit to match. Press the fit kit firmly onto the pegs.



Step 2

Locate your SumUp Air arm and 4x wall screws and 4x rawl plugs

Use a spirit level to ensure the mount is perfectly horizontal. Mark up the four outer holes onto the wall so you know where to drill.

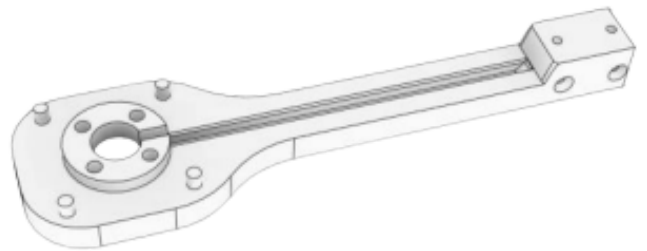

Step 3

Before drilling decide:

Option 1: For a neat installation, the two USB power cables should be channelled through the wall via the central hole.

Option 2: If you can't drill all the way through the wall, you can use the alternative cable channel which comes out of the bottom of the mount.

Drill the wall and install the rawl plugs using your marks as a guide.

If you're mounting onto dry board or other wall types, please use the appropriate fixings.


Thread the micro-USB through **Option 1** or **Option 2** and along the card reader mount central channel. This cable is used to power the card reader.

Line the card reader holder up with the four rawl plugs in your wall and use the supplied bronze screws to attach to the wall. Don't over tighten the screws.

Outer holes for fixing to wall

Option 1: Central hole for cables through wall


Option 2: Alternative cable channel

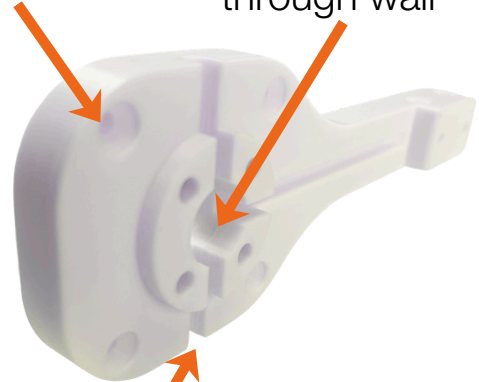

Step 4

Now thread the L shaped USB-C cable through **Option 1** or **Option 2** and don't put in channel. This cable will be attached to your tablet.

Installed on the wall

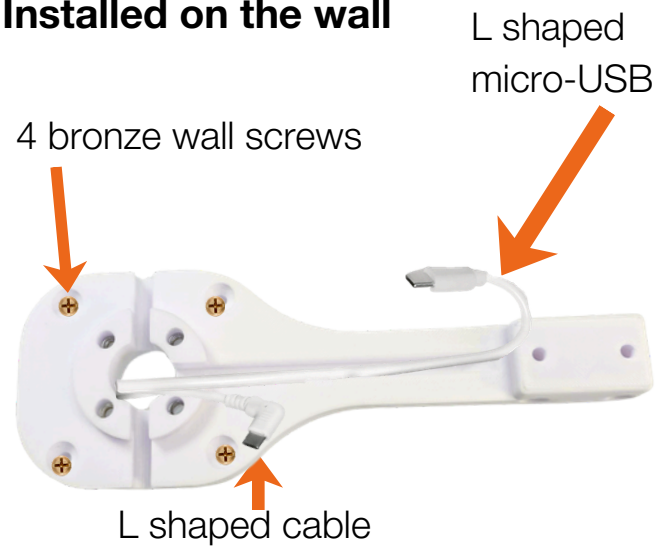

Now take the micro-USB cable. This will plug into your SumUp Air card reader. Feed the wire along the channel of the extension arm as shown.

Make sure there is enough cable slack to allow connection to the SumUp Air card reader. You will need approx. 30-35cm of exposed USB cable to reach the SumUp Air USB port.



INCORRECT

cable outside of channel



CORRECT


cable inside of channel

Step 5

Now it's time to install the locpad casing. Place the locpad into the central round section and feed the L shaped cable through.


Use the supplied 4x 15mm screws to attach the locpad case to the arm on the wall.

TOP TIP: Don't over tighten the screws

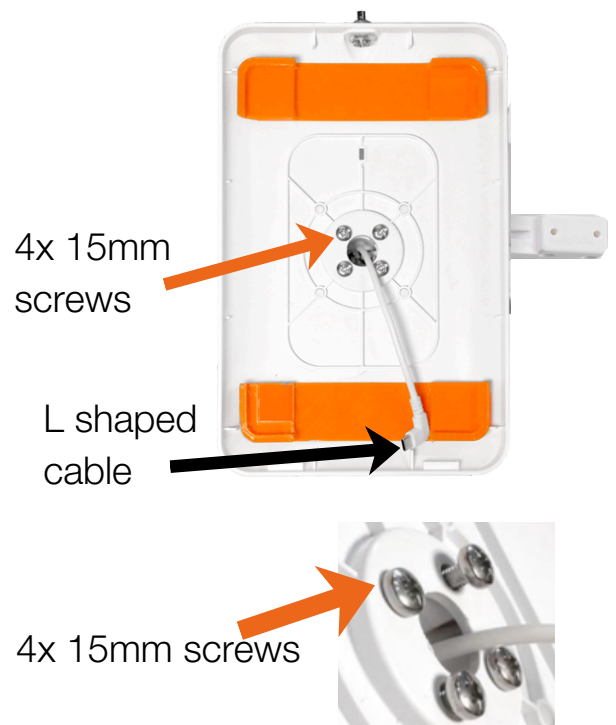

Step 6

It's now time to secure the card reader holder to the stand. Use the 2x 30mm screws supplied to attach the card reader holder to the main extension arm.

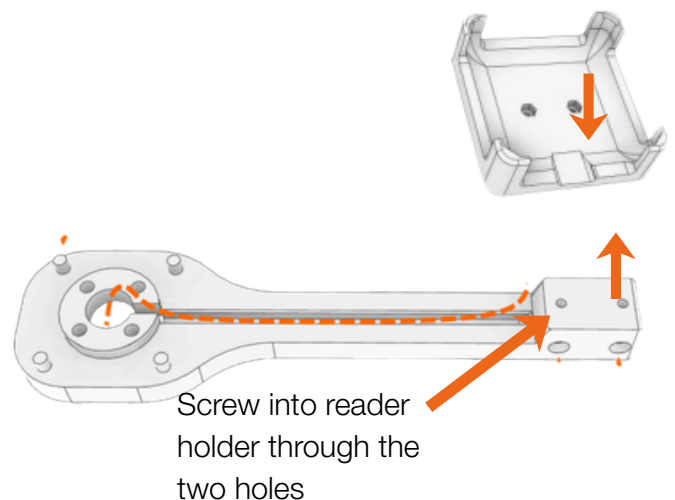

Step 7

To slot the SumUp Air reader in place, place the bottom of the reader into the mount and pivot until it clicks into place.

Note: The SumUp Air must be installed in this specific direction to avoid breakage



Step 8

At this stage, the locpad case card reader, and cabling should look like this. Connect the charging cable to the tablet and slot your tablet into the 'fit kit'. The tablet should fit snugly in place.

The tablet isn't fully secure yet, so be careful not to let it fall out!



Step 9

Finally you will need the acrylic faceplate and the front metal plate.

There may be a brown protective covering on the plastic faceplate, if so peel it off. Lay the faceplate on top of the tablet using the slots as guides.



Acrylic faceplate sits on top

Step 10

Then on the metal front plate you will see two hooks on the underside. These line up to the appropriate slots on the main enclosure.

Slot these in and pivot the rest of the metal plate down onto the enclosure. Press the barrel lock button to lock and secure the metal plate in place.

To release the tablet, insert the key into the barrel lock and rotate until the button 'pops' out to release the plate lock.

If you have any questions at all, please just contact us for support.



Metal hooks slot into place



Push the button down to lock the metal front plate in place.
Use the keys to unlock